


December 16, 2020

QUESTIONS AND ANSWERS

SET #5

TO : All Prospective Bidders
FROM : Cathy Clegg, Construction Contracts Administrator
SUBJECT : Set #5 - Contract C20011 – Restroom Renovations at Chaboya Building A

Q36. Just confirming that it is the intent of the Owner to have microcement on the upper 16” of the walls, with the ceiling painted.

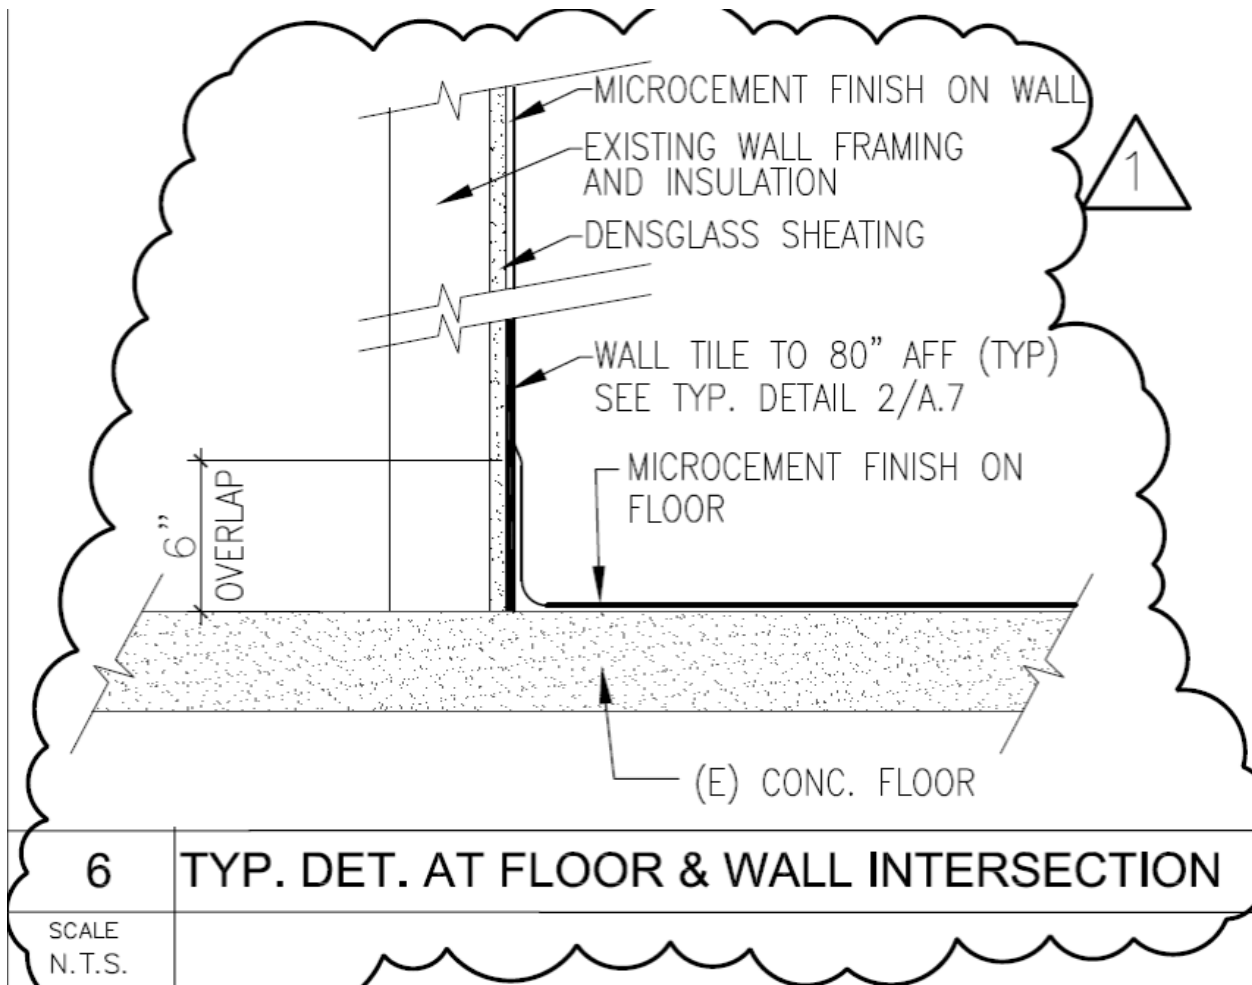

A36. Restrooms - All walls (except Storage Room) – floor to 80” AFF to be finished in tile. Remaining wall above the tiles to be finished in Microcement. Ceiling to be painted.

Storage Room – Microcement on floor and wall walls. Ceiling to be painted.

Corridor adjoining the Restrooms & Storage Room – Finish to match finishes in the existing corridor.

If you have any questions, please do not hesitate to email me at cathy.clegg@vta.org.

Sincerely,



Cathy Clegg
Construction Contracts Administrator